


# Hyflex 10

Hyflex 10 is a proven, high performance waterproofing system made up of rubber modified, bituminous coatings reinforced with two polyester carriers.

The system comes with a 10 year guarantee covering both materials and workmanship.

Hyflex 10 is ideally suited for use over traditional roofing membranes, such as asphalt and reinforced bituminous membranes. Applied in liquid form it is also particularly suitable for intricate detail work.

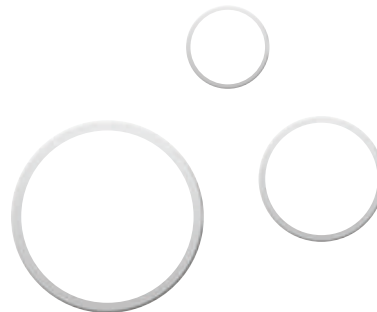

## Key Features

- Seamless
- Light in weight
- Easily maintained
- Suitable for maintenance traffic
- Cold applied
- AA fire rating
- 10 year guarantee
- Long life expectancy
- Single source security
- Revival system available
- Optional colour finishes
- Excellent value for money
- BBA certified

## Hyflex 10

### Product details

#### Application

After preparing the surface in the appropriate way apply by brush or roller to the main areas and by brush to the detail areas in the following sequence.

**Hyvodex Primer**, a low viscosity, solvent based bituminous primer.

**Hyflex Base Coat**, a bituminous high build liquid coating, available in both solution (winter) and emulsion (summer) formulations.

**Hyflex Membrane**, a 50 gramme bi-component polyester/polyamide reinforcement membrane, which because of its thermally welded composition provides high tensile strength and puncture resistance to the system.

**Hyflex Membrane D**, a warp knitted polyester membrane with superb drape characteristics which is designed to facilitate work on complex details. In addition, in stress situations at upstands and flashings, it provides exceptional strength and flexibility to the system.

**Hyflex Base Coat**, a bituminous high build liquid coating, available in both solution (winter) and emulsion (summer) formulations.

**Hyflex Finish Coat**, a rubber modified liquid bitumen designed to give maximum elasticity to the weathering layer and resistance to flexural fatigue. Also available in winter and summer grades.


**Hyflex Roofing Solar Reflective Finish**, provides the standard solar reflective coating, however where design considerations dictate, colour finishes are available.

For further details and downloadable specification go to:  
NBS Plus - Section J31- Liquid Applied Waterproof Roof Coverings  
Reference - 110 Cold Applied Roof Coverings.

#### Standard Specification

- Hyvodex Primer @ 6.5m<sup>2</sup>/l
- Hyflex Base Coat @ 1.0m<sup>2</sup>/l
- Hyflex Membrane
- Hyflex Base Coat @ 1.0m<sup>2</sup>/l
- Hyflex Membrane
- Hyflex Finish Coat @ 1.0m<sup>2</sup>/l
- Hyflex Roofing Solar Reflective Finish 10m<sup>2</sup>/l

#### Installation Hyflex 10

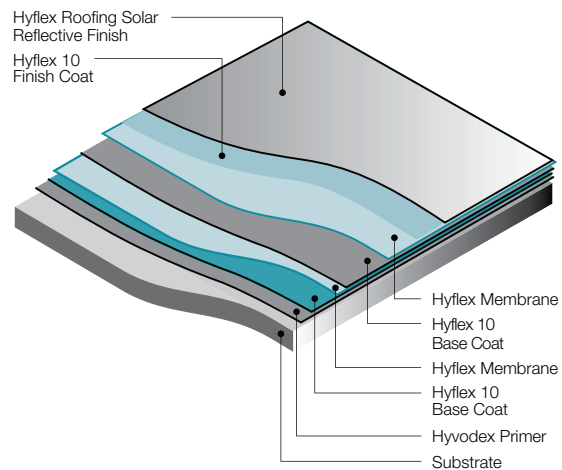

flame free waterproofing – providing the solution

Hyflex: Amasco House, 101 Powke Lane, Cradley Heath, West Midlands B64 5PX

For further information please call:

**0121 502 9580**

e-mail us

**enquiries@hyflex.co.uk**

or visit our webpage

**www.hyflex.co.uk**