


Hyflex 15

Hyflex 15 is a cold applied liquid roof waterproofing system based on modified bitumens giving a comprehensive 15 year guarantee.

Hyflex 15 has evolved as a result of the process of continuous product development. The system utilises constituents of our traditional bituminous liquid coatings combined with additional modified coatings, which provide increased flexibility, strength and durability.

Compatible with most substrates including mastic asphalt, built up felt roofing, timber and concrete. As with all Hyflex systems, being applied in liquid form it is particularly suitable for dressing to intricate detail work.

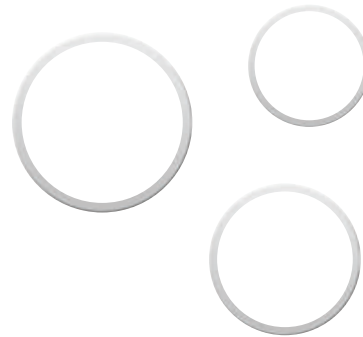

Key Features

- 15 year guarantee
- Seamless
- Light in weight
- Easily maintained
- Suitable for maintenance traffic
- Cold applied
- AA fire rating
- Long life expectancy
- Single source security
- Revival system available
- Optional colour finishes
- Excellent value for money
- Improved durability
- Multiple substrate compatibility

Hyflex 15

Product details

Application

After preparing the surface, apply by brush or roller to main areas and by brush to detail areas in the following sequence.

Hyvodex Primer, a low viscosity, solvent based bituminous primer

Hyflex Base Coat, a bituminous high build liquid coating, available in both solution (winter) and emulsion (summer) formulations.

Hyflex Membrane, a 50 gramme bi-component polyester/polyamide reinforcement membrane, which because of its thermally welded composition provides high tensile strength and puncture resistance to the system.

Hyflex Base Coat, a bituminous high build liquid coating, available in both solution (winter) and emulsion (summer) formulations.

Hyflex Membrane, a 50 gramme bi-component polyester/polyamide reinforcement membrane, which because of its thermally welded composition provides high tensile strength and puncture resistance to the system.

2 Layers:

Hyflex Finish Coat, a rubber modified liquid bitumen designed to give maximum elasticity to the weathering layer and resistance to flexural fatigue. Also available in winter and summer grades.



Hyflex Roofing Solar Reflective Finish, provides the standard solar reflective coating, however where design considerations dictate, colour finishes are available.

For further details and downloadable specification go to:
NBS Plus - Section J31- Liquid Applied Waterproof Roof Coverings
Reference - 110 Cold Applied Roof Coverings.

Standard Specification

- Hyvodex Primer @ 6.5m²/l
- Hyflex 15 Base Coat @ 1.0m²/l
- Hyflex Membrane
- Hyflex 15 Base Coat @ 1.0m²/l
- Hyflex Membrane
- Hyflex 15 Finish Coat @ 1.0m²/l
- Hyflex 15 Finish Coat @ 1.0m²/l
- Hyflex Roofing Solar Reflective Finish 10m²/l

Installation Hyflex 15

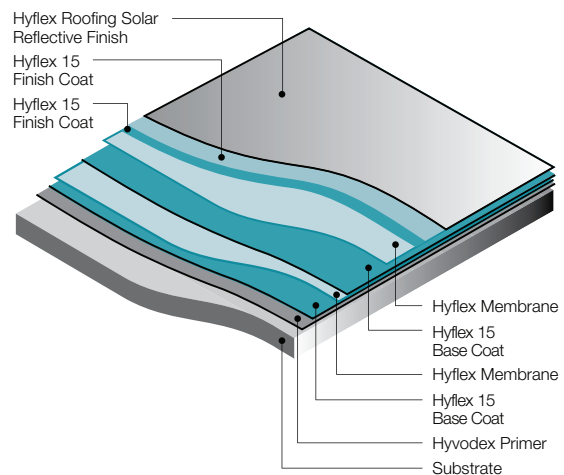

flame free waterproofing – providing the solution

Hyflex: Amasco House, 101 Powke Lane, Cradley Heath, West Midlands B64 5PX

For further information please call:

0121 502 9580

e-mail us

enquiries@hyflex.co.uk

or visit our webpage

www.hyflex.co.uk