

Hyflex 10 Plus

Cold applied liquid roof waterproofing designed for use over compressible substrates such as insulation, or over substrates which are not suitable for direct application of a liquid coating.

Complete with a 10 year guarantee covering both materials and workmanship.


Where design requirements call for insulation, Hyflex 10 Plus insulation is available as an integral part of the system.

Hyflex 10 Plus uses the same proven waterproofing constituents as Hyflex 10 with the addition of an SBS modified, polyester reinforced base sheet which acts as a carrier for the liquid coatings. This is bonded to the substrate using Hyflex Cold Bond liquid adhesive. This offers additional puncture resistance which makes the system more appropriate for use over compressible substrates.



Key Features

- Seamless
- Light in weight
- Easily maintained
- Suitable for maintenance traffic
- Cold applied
- AA fire rating
- 10 year guarantee
- Long life expectancy
- Single source security
- Revival system available
- Optional colour finishes
- Excellent value for money
- BBA certified
- Improved puncture resistance
- Suitable for use over insulation

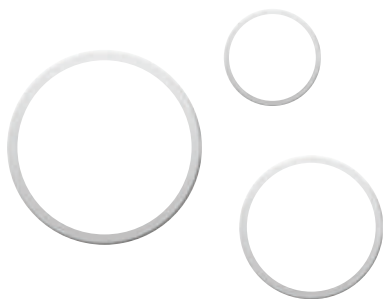

Hyflex 10

Product details

Application

After preparing the surface in the appropriate way apply by brush or roller to the main areas and by brush to the detail areas in the following sequence.

Hyvodex Primer, a low viscosity, solvent based bituminous primer.

Hyflex Base Coat, a bituminous high build liquid coating, available in both solution (winter) and emulsion (summer) formulations.

Hyflex Membrane, a 50 gramme bi-component polyester/polyamide reinforcement membrane, which because of its thermally welded composition provides high tensile strength and puncture resistance to the system.

Hyflex Membrane D, a warp knitted polyester membrane with superb drape characteristics which is designed to facilitate work on complex details. In addition, in stress situations at upstands and flashings, it provides exceptional strength and flexibility to the system.

Hyflex Base Coat, a bituminous high build liquid coating, available in both solution (winter) and emulsion (summer) formulations.

Hyflex Finish Coat, a rubber modified liquid bitumen designed to give maximum elasticity to the weathering layer and resistance to flexural fatigue. Also available in winter and summer grades.


Hyflex Roofing Solar Reflective Finish, provides the standard solar reflective coating, however where design considerations dictate, colour finishes are available.

For further details and downloadable specification go to:
NBS Plus - Section J31- Liquid Applied Waterproof Roof Coverings
Reference - 110 Cold Applied Roof Coverings.

Standard Specification

- Hyvodex Primer @ 6.5m²/l
- Hyflex Base Coat @ 1.0m²/l
- Hyflex Membrane
- Hyflex Base Coat @ 1.0m²/l
- Hyflex Membrane
- Hyflex Finish Coat @ 1.0m²/l
- Hyflex Roofing Solar Reflective Finish 10m²/l

Installation Hyflex 10

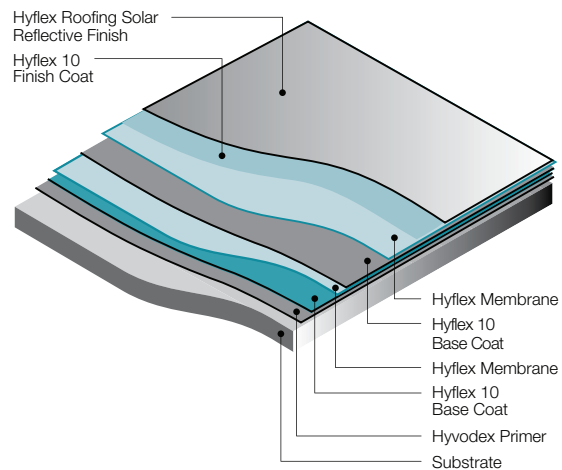

flame free waterproofing – providing the solution

Hyflex: Amasco House, 101 Powke Lane, Cradley Heath, West Midlands B64 5PX

For further information please call:

0121 502 9580

e-mail us

enquiries@hyflex.co.uk

or visit our webpage

www.hyflex.co.uk