

Hyflex 10 Profile

Hyflex 10 Profile uses proven coating technology to provide an effective, lightweight overlay waterproofing system and is ideally suited for use over old and weathered roofs, such as coated metal roof sheets.

Applied in liquid form, Hyflex 10 Profile will waterproof any profile.

Overlap joints and mechanical fixings are reinforced with a flexmat polyester reinforcement membrane, embedded in the liquid coating to provide a flexible and effective waterproofing system.



Key Features

- Seamless
- Light in weight
- Low maintenance
- Suitable for maintenance traffic
- Cold applied
- AA fire rating
- 10 year guarantee
- Long life expectancy
- Single source security
- Revival system available
- Optional colour finishes
- Excellent value for money

Hyflex 10 Profile

Product details

Application

After preparing the surface, apply by brush or roller to main areas and by brush to detail areas in the following sequence.

Hyflex Primer, a low viscosity, solvent based bituminous primer.

Hyflex 10 Profile Base Coat, a bituminous, high build liquid coating available in both solution (winter) and emulsion (summer) formulations, applied to laps and fixings.

Hyflex Flexmat, a chopped strand polyester mat for reinforcing overlaps and fixings.

Hyflex 10 Profile Base Coat, a bituminous, high build liquid coating available in both solution (winter) and emulsion (summer) formulations.

Hyflex 10 Profile Finish Coat, a rubber modified liquid bitumen designed to give maximum elasticity to the weathering layer and resistance to flexural fatigue. Available in winter and summer grades.

Hyflex Roofing Solar Reflective Finish, provides the standard solar reflective coating, however where design considerations dictate, colour finishes are available.

Note: Attention is drawn to HSG 33 published by the Health and Safety Executive, which classifies many pitched roofs of this type as fragile. This means that additional elements concerning health and safety may need to be considered.


For further details and downloadable specification go to:

NBS Plus - Section J31- Liquid Applied Waterproof Roof Coverings
Reference - 110 Cold Applied Roof Coverings.

Standard Specification

- Hyvodex Primer @ 6.5m²/l
- Hyflex 10 Profile Base Coat @ 1.0m²/l to laps and fixings
- Hyflex Flexmat to laps and fixings
- Hyflex 10 Profile Base Coat @ 1.0m²/l
- Hyflex 10 Profile Finish Coat @ 1.0m²/l
- Hyflex Roofing Solar Reflective Finish 10m²/l

Installation Hyflex 10 Profile

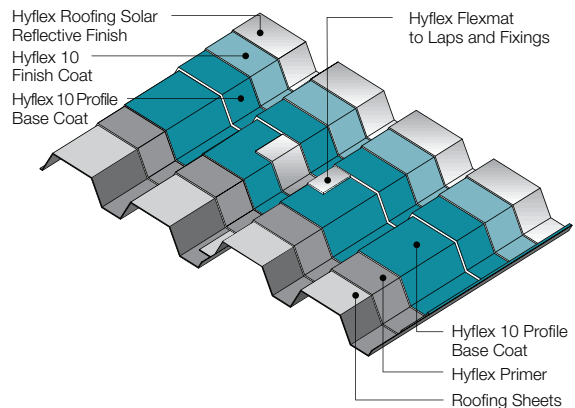

flame free waterproofing – providing the solution

Hyflex: Amasco House, 101 Powke Lane, Cradley Heath, West Midlands B64 5PX

For further information please call:

0121 502 9580

e-mail us

enquiries@hyflex.co.uk

or visit our webpage

www.hyflex.co.uk